

WECON

PI3102i

- One Series port, two communication ports supported. COM1:RS485/RS422; COM2:RS232
- Software: PISudio
- Faster in boot speed, screen switching speed and refresh speed.




SPECIFICATIONS

Item		PI3102i
CPU		Cortex A7 528MHz
Touch Screen		High precision four-wire resistive
Display	Screen	10.2 inch
	Resolution	1024*600
	Brightness	350cd/m ²

	Backlight	50,000 hours
	Colors	16,000k colors
Storage	FLASH	128M
	RAM	DDRIII 128MB
I/O ports	USB interface	USB Host+USB Client
	COM1	RS422/RS485
	COM2	RS232
	Ethernet	Yes
	CAN	N/A
Power Supply	Power Supply	24V DC (12~28V DC)
	Power	<10W
Dimension	Power Isolation	PC+ABS
	Dimension(*H*D)	272.0*192.0*41.5 mm
	Mounting size(W*H)	260.0*179.0 mm

	Net / Gross Weight (kg)	1.00 / 1.31
Operation Environment	Protection	IP65 (Front panel)
	Storage environment	Storage: -20℃~70℃; Working: -10℃~60℃
	Working Environment	10~85%RH (Non-condensing)
	Seismic resistance	IEC61131-2 standard Continuous vibration occasion: 10Hz~57Hz 0.075mm, 57Hz~150Hz 9.8m/s ² Discontinuous vibration: 10Hz~57Hz 0.035mm, 57Hz~150Hz 4.9m/s ² X, Y, Z in 10 directions each (80 minutes)

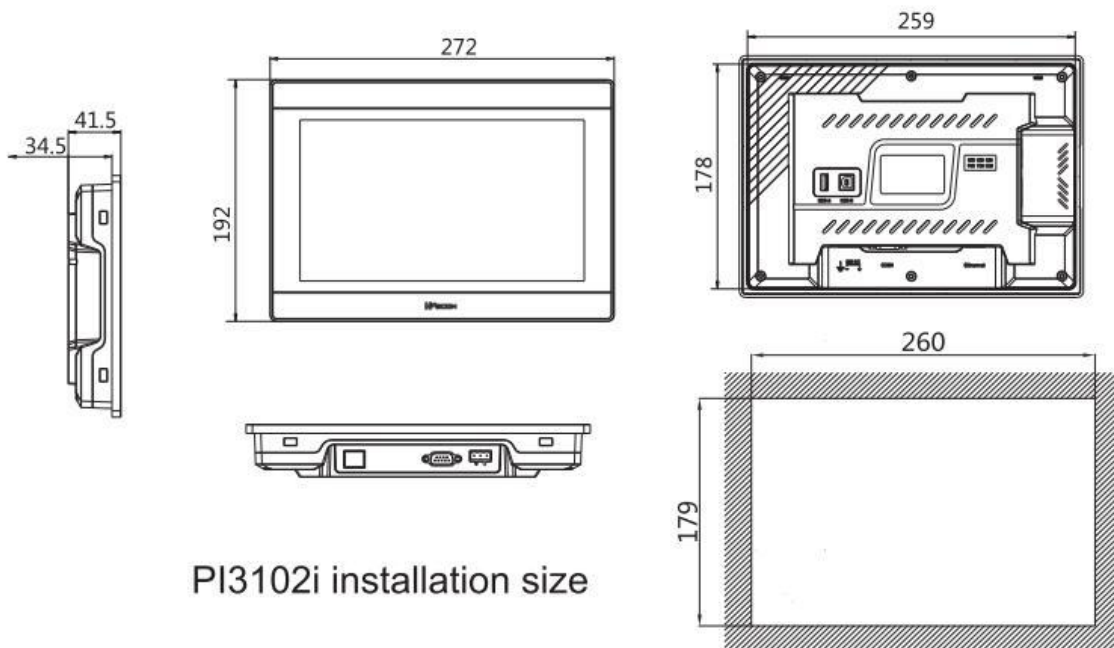

Contacts:

Email: sales@we-con.com.cn

Skype: lily-wecon

Tel:+0086-591-87868869 ext 894